



Technical Data:	
Dimensions	1474 x 1990 x 672 mm
No of Spindles Norminal	8
Power	56 kW
Capacity	48/56 poultry/h (depending on weight)
Voltage	230 V
Recommended Fuse	10/16 A

Product Description:

- Direct and guided spindle on independent motors with depth adjustment.
- Thermal protection by 4 tempered glass, emergency stop “punch”, glass door handles insulated from heat by carbon washer; hinges controlled by a locking system “open windows”.
- Fully removable rounded angles interior.


Installation requirements:

- Electrical power provided by customer.


Options:

- RAL colour for the rotisserie
- Personalisation (Custom made top frame with customers logo or trade name)

Accessories:



Front View

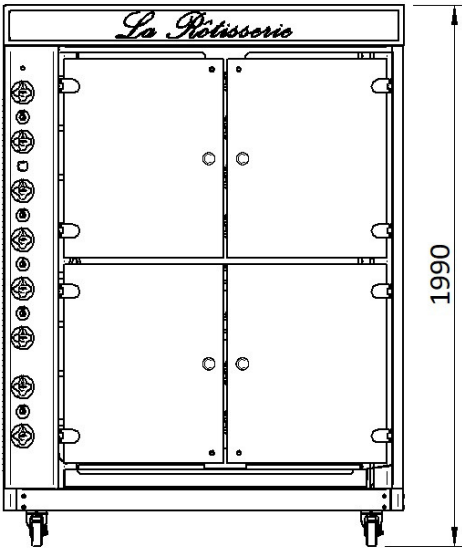

Top View

