



Technical Data:	
Dimensions (LxWxH)	1335 x 780 x 1040 mm
Height without gallery	1280 mm
Weight when empty	174 kg
Number of levels	2 x 12
Maximum number of trays	24
Gap between levels	78 mm
Voltage	415 V three phase AC 50 Hz
Power	5.01 kW
Recommended Fuses	15 A
Noise level	57 dBA

Product Description:


- Stainless steel internal & external monobloc construction (for high resistance & durability) with thermoformed ABS panels, insulated walls, automatic air dams and non-marking rotomoulded bumpers.
- IPX5 protection with stainless steel fall-protection rails, protective bumpers, ergonomic handles and secure door locks.
- Digital control panel with reheating timer, alarms, programming, clock and USB interface.
- Two insulated 270° doors, with optional four-door configuration and interchangeable seals.
- Removable racks and seals, manual drain pan and condensate drain valve for easy maintenance.
- 4 x 160 mm wheels (2 fixed, 2 swivel with brakes), with optional 6-wheel and stainless steel configurations.
- Standard power cable with optional plug configurations and USB connectivity.

Options:


- Available in CookServ or CookChill version
- Folding shelf + with integrated waste bag holder
- Battery/Camera/Cable outlet with external cable
- Wash water and condensate drain foot pedal
- Tilting hitch system
- 2 or 4 door version with lock option
- Trays option: Gastronorm or Gastronorm+
- SOCONNECT : 360° overview online traceability platform



Front View

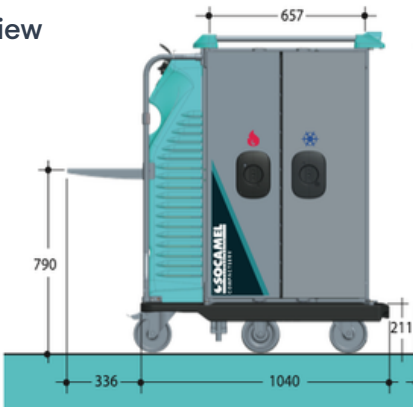

Side View

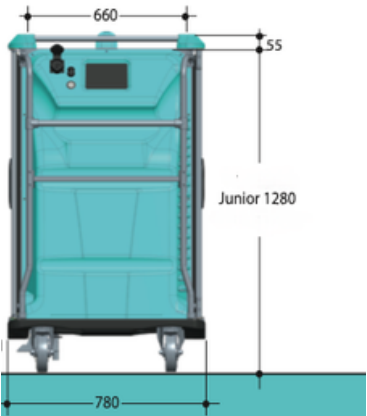

Top View

