

INDUCTION TABLETOP MODEL NO: BRIC3000

MADE IN FRANCE


Ready to use - Place on a counter, Plug & Play

Setting	Power (watts)	Setting	Power (watts)
1	25	14	1000
2	50	15	1100
3	100	16	1200
4	150	17	1300
5	200	18	1400
6	250	19	1600
7	300	20	1800
8	400	21	2000
9	500	22	2200
10	600	23	2400
11	700	24	2700
12	800	25	3000
13	900		

Product Advantages:

- Generator coil: Double generator coil 180 mm & 280 mm diameter with automatic selection and manual override for single or double coil use.
- Timer: Integrated 99 minute timer with audio and visual alarm and power shut down mode.
- Controls: Glass touch control panel having coil selector control, manual power setting (+/-) with display, preset power setting and timer control with display.



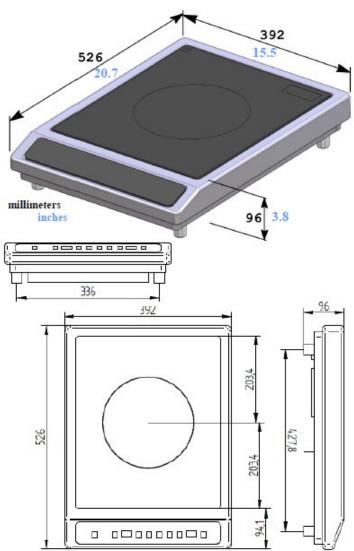

Technical Data:

Width x Depth x Height 392 x 526 x 90 mm Connected load (kW) 3 Voltage (V) 2401 phase AC Recommended fuses 1 x 15 External Structure AISI 304 stainless steel **Cooking surface** Vitroceramic top Generator coil 265 mm diameter **Control panel** Glass touches Weight (net) 8.5 kg Details and options Including a 1m60 power cord and a filter (wash regularly)



phoeniks.com.au P- 1300 405 404 E- contact@phoeniks.com.au