



## ■ Ventilated heating cupboard

The ventilated heating cupboards allow you to link cooking and distribution, whilst also guaranteeing meals at the right temperature and with no loss of taste for the consumer.

### Capacity

- 3 drawers GN1/1
- From 4 to 17 levels GN1/1
- From 10 to 20 levels GN2/1

### Standard equipments


- Regulation by thermostat with control light, temperature display by mechanical thermometer
- Tray racks designed to hold GN1/1 & GN2/1 racks (not supplied) or GN1/1 containers (not supplied)
- 4 swivel wheels W 125 mm

### Construction

- Stainless steel K41 (TNB)
- Opening steel or glass door (except for models with 4 levels and 3 drawers, only steel door or drawers)
- Ventilated heating with stainless steel heating element
- Rock wool insulation, 30 mm thick
- Grab handle and corner scuff protections in rubber, except for the "4 levels" cupboard

### Options

- Manual humidity control (GN1/1-65 container with anti-wave facility)

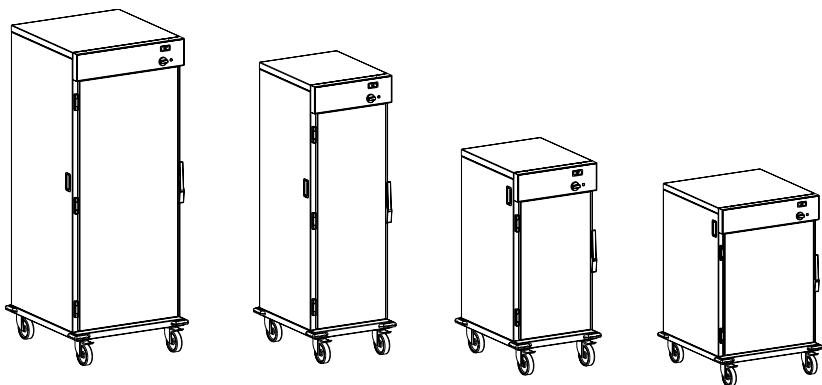

## Ventilated heating cupboard

Code	Dimensions	Capacity	Power
32770	730x770x1900 mm	Mobile cupboard - capacity 20 levels GN 2/1 tray racks spacing 70 mm - 1 steel door	M - 2300 W
32774	730x770x1900 mm	Mobile cupboard - capacity 20 levels GN 2/1 tray racks spacing 70 mm - 1 glass door	M - 2300 W
32771	730x770x1200 mm	Mobile cupboard - capacity 10 levels GN 2/1 tray racks spacing 70 mm - 1 steel door	M - 1600 W
32775	730x770x1200 mm	Mobile cupboard - capacity 10 levels GN 2/1 tray racks spacing 70 mm - 1 glass door	M - 1600 W
32772	525x650x1690 mm	Mobile cupboard - capacity 17 levels GN 1/1 tray racks spacing 70 mm - 1 steel door	M - 1600 W
32776	525x650x1690 mm	Mobile cupboard - capacity 17 levels GN 1/1 tray racks spacing 70 mm - 1 glass door	M - 1000 W
32773	525x650x1200 mm	Mobile cupboard - capacity 10 levels GN 1/1 tray racks spacing 70 mm - 1 steel door	M - 1000 W
32777	525x650x1200 mm	Mobile cupboard - capacity 10 levels GN 1/1 tray racks spacing 70 mm - 1 glass door	M - 1000 W
32508	690x665x715 mm	Mobile cupboard - capacity 4 levels GN 1/1 tray racks spacing 115 mm - 1 steel door	M - 1500 W
32608	690x665x715 mm	Armoire mobile 3 tiroirs GN 1/1	M - 1500 W

## Option

Code	
32910	Manual humidity control (1 GN1/1-65 container with anti-wave facility)

## Electrical symbols

M = Single-phased wiring (1N 230V + earth). Power given in Watt (W)