## FLEXICOMBI MAGIC PILOT MAXI 6.2 ELECTRIC MODEL NO: FKE062R\_MP

MKN combi steamer FlexiCombi 12 tray GN 1/1, with MagicPilot operation system.

## **Product Advantages:**

- MagicPilot Robust, wear-free, capacitive true colour touch screen.
- Video assist Interactive user assistance with clips featuring professional chefs.
- CombiDoctor Self-diagnosis programme.
  GreenInside Indicates the energy and water consumption for each cooking programme.
- AutoChef Up to 350 individual cooking programmes and manual operating system.
- Durable hygienic cooking chamber and chamber door with insulated triple glazing.
- DynaSteam2 It speeds up the cooking process and saves energy.
- Integrated heat exchanger.
- WaveClean Automatic cleaning system
- (safe, easy, economical).
- · USB interface.
- 3 years warranty parts and labour.


## Installation requirements:


- Soft Water / Water supply / Connection to waste water provided by customer.
- If mineral content is high, reverse osmosis system may be advisable.

Capacity : Meals per day





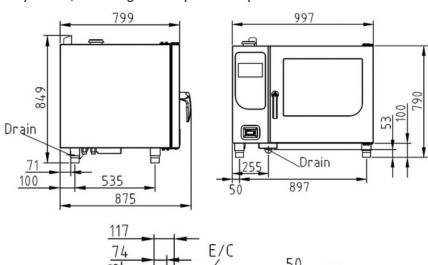



Technical Data:	
Width x Height x Depth (mm)	997 x 790 x 799
Connected load (electrical) (kW):	20.9
Voltage (V) / EC:	415 3 phase AC
Recommended fuses (A):	3 x 32
Frequency range (Hz):	50
Soft Water connection:	DN 20 (R 3/4" inside)
Water connection:	DN 20 (R 3/4" inside)
Waterpressure (kPa):	200 - 600 (2 - 6 bar)
Drain connection:	DN 50
Gastronorm 1/1 (530 x 325 mm):	12 (max. 65 mm deep)
Gastronorm 2/1 (530 x 650 mm):	6 (max. 65 mm deep)
Plates Ø 28 cm	24
Plates Ø 32 cm – plate trolley :	22
Material housing:	1.4301
Material cooking chamber:	1.4404
Gross weight (kg):	160
Heat emission latent (W):	3516
Heat emission sensitive (W):	2344
Type of protection:	IPX 5









